

NVR12-32800FN-16P(2U)


32CH 12MP NDAA-compliant Face Recognition PoE NVR with alarms

Provision-ISR NVR12-32800FN-16P(2U) is a high-performance network video recorder with an integrated 16-channel PoE switch for high-definition surveillance. The device features 16 alarm inputs + 4 alarm outputs and supports Face Recognition and Advanced Video Analytics (DDA). This easy-to-install solution is suitable for big-sized installations (up to 32 channels). It also complies with NDAA demands. Check Point Quantum IoT Nano agent is integrated into this model. It provides an advanced threat prevention layer against the common attack vectors at runtime.

32
CH

CHECK POINT
EMBEDDED

12
MP

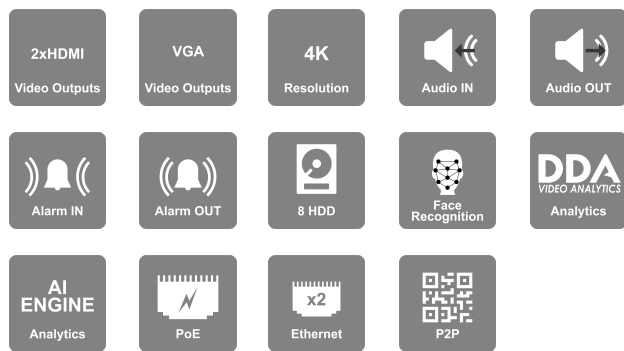

MAIN FEATURES

Video:

- Input: 32 Channel Support
- 32 Channel PoE / Standard Network Connection (Via 32 x RJ-45 / Network)
- -16 Channel Standard Connection (Via RJ-45 Network Port)
- Output: HDMI1 (4K 30/60Hz, 1080P, 1280×1024), HDMI2 + VGA (1280×1024, 1080P)

Bandwidth:

- Incoming: 192Mbps
- Outgoing: 192Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd

Playback:

- Local: 16Ch Simultaneously
- Remote: 16Ch Simultaneously

Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output
- 2 Way Audio

Alarm:

- Input: 16+IPC
- Output: 4+IPC

Storage:

- 8 x SATA (Up to 10TB each)
- 1 x E-SATA (Up to 10TB each)

USB Port:


Recording.

Remarks:

SPECIFICATIONS

- FPS: 800 (PAL) / 960 (NTSC)

- The following features are based on firmware v1.4.10 and

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™ 
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	32Ch over Network (out of which up to 16Ch PoE Direct Connection)
Output	HDMI1 (4K 30/60Hz, 1080P, 1280x1024), HDMI2 + VGA (1280x1024, 1080P)
View Mode	Independent*, Up to 32ch on monitor1 + 9ch on monitor2
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 12MP ; 4Ch - 4MP ; 9-32Ch - D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC Outputs
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition, LPR, Thermal. Advanced Face Recognition Mode: Supports up to 2 Non-AI IPC and performs face detection and recognition.
Analytics Channels (IPC Based)	32Ch (requires supporting IPC)
Analytic Channels (NVR Based)	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (IPC does Detection) (or their combinations)
Face Recognition Rate	18 Faces per second (6Ch supported)
Bandwidth	
Incoming	192Mbps

Outgoing	192Mbps
Record/ Main Stream	
Real-Time Recording	32CH 12MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS, and all of its combinations
16MP	N/A
12MP	960FPS(NTSC)/800FPS(PAL)
8MP	960FPS(NTSC)/800FPS(PAL)
5MP and lower	960FPS(NTSC)/800FPS(PAL)
Master stream over network	Up to 32CH@Recording resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	160Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	128 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View/Playback)
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	16Ch
Remote	16Ch

NVR12-32800FN-16P(2U)

Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
--------------------	---

Backup

USB	1 USB 2.0 Port + 1 USB 3.0 Port
------------	---------------------------------

Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
----------------------	--

Alarm

Alarm-in	16+IPC
-----------------	--------

Alarm-out	4+IPC
------------------	-------

Storage

HDD	8
------------	---

E-Sata Support	1
-----------------------	---

RAID	N/A
-------------	-----

PTZ

Connection	Via Network
-------------------	-------------

Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
---------------------------	--

RS-485	Yes (C06 Keyboard Connection)
---------------	-------------------------------

Network

Ethernet	2x1000/100/10Mbps self-adaptive Ethernet interface
-----------------	--

Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
------------------	---

ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)
--------------	--

PoE

PoE Ports	16xRJ45
------------------	---------

Speed	10/100Mbps (10Mbps Under CCTV Mode)
--------------	-------------------------------------

Standard	PoE (IEEE802.3AF/AT)
-----------------	----------------------

NVR12-32800FN-16P(2U)

CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	150W (Average 9.3W per Channel)
Max. Power Output (Per Ch.)	~25.5W
Others	
Power Supply	AC100-240V
Power consumption (No HDD)	30W
Dimension	W445xD436xH90mm
Operation Temperature	0°C~50°C