



SHOCK SENSOR RANGE INCLUDING A MODEL WITH
INTEGRAL DOOR CONTACT FACILITY

**The Viper perimeter products offer
the most extensive range and are
tailored to the needs of both the
installer and the end user**

Viper features

- First to alarm option (Viper GLX only)
- Integral door contact (Viper GLX with contacts only)
- Non gravity dependent
- Walk test facility
- Remote reset
- White or brown option
- 10 year guarantee
- Patented "commando boot" base

Integral lens



Tamper protection


LED enable option

Calibrated sensitivity control

Piezo beam detection

Dual stage sensitivity

Double Knock option

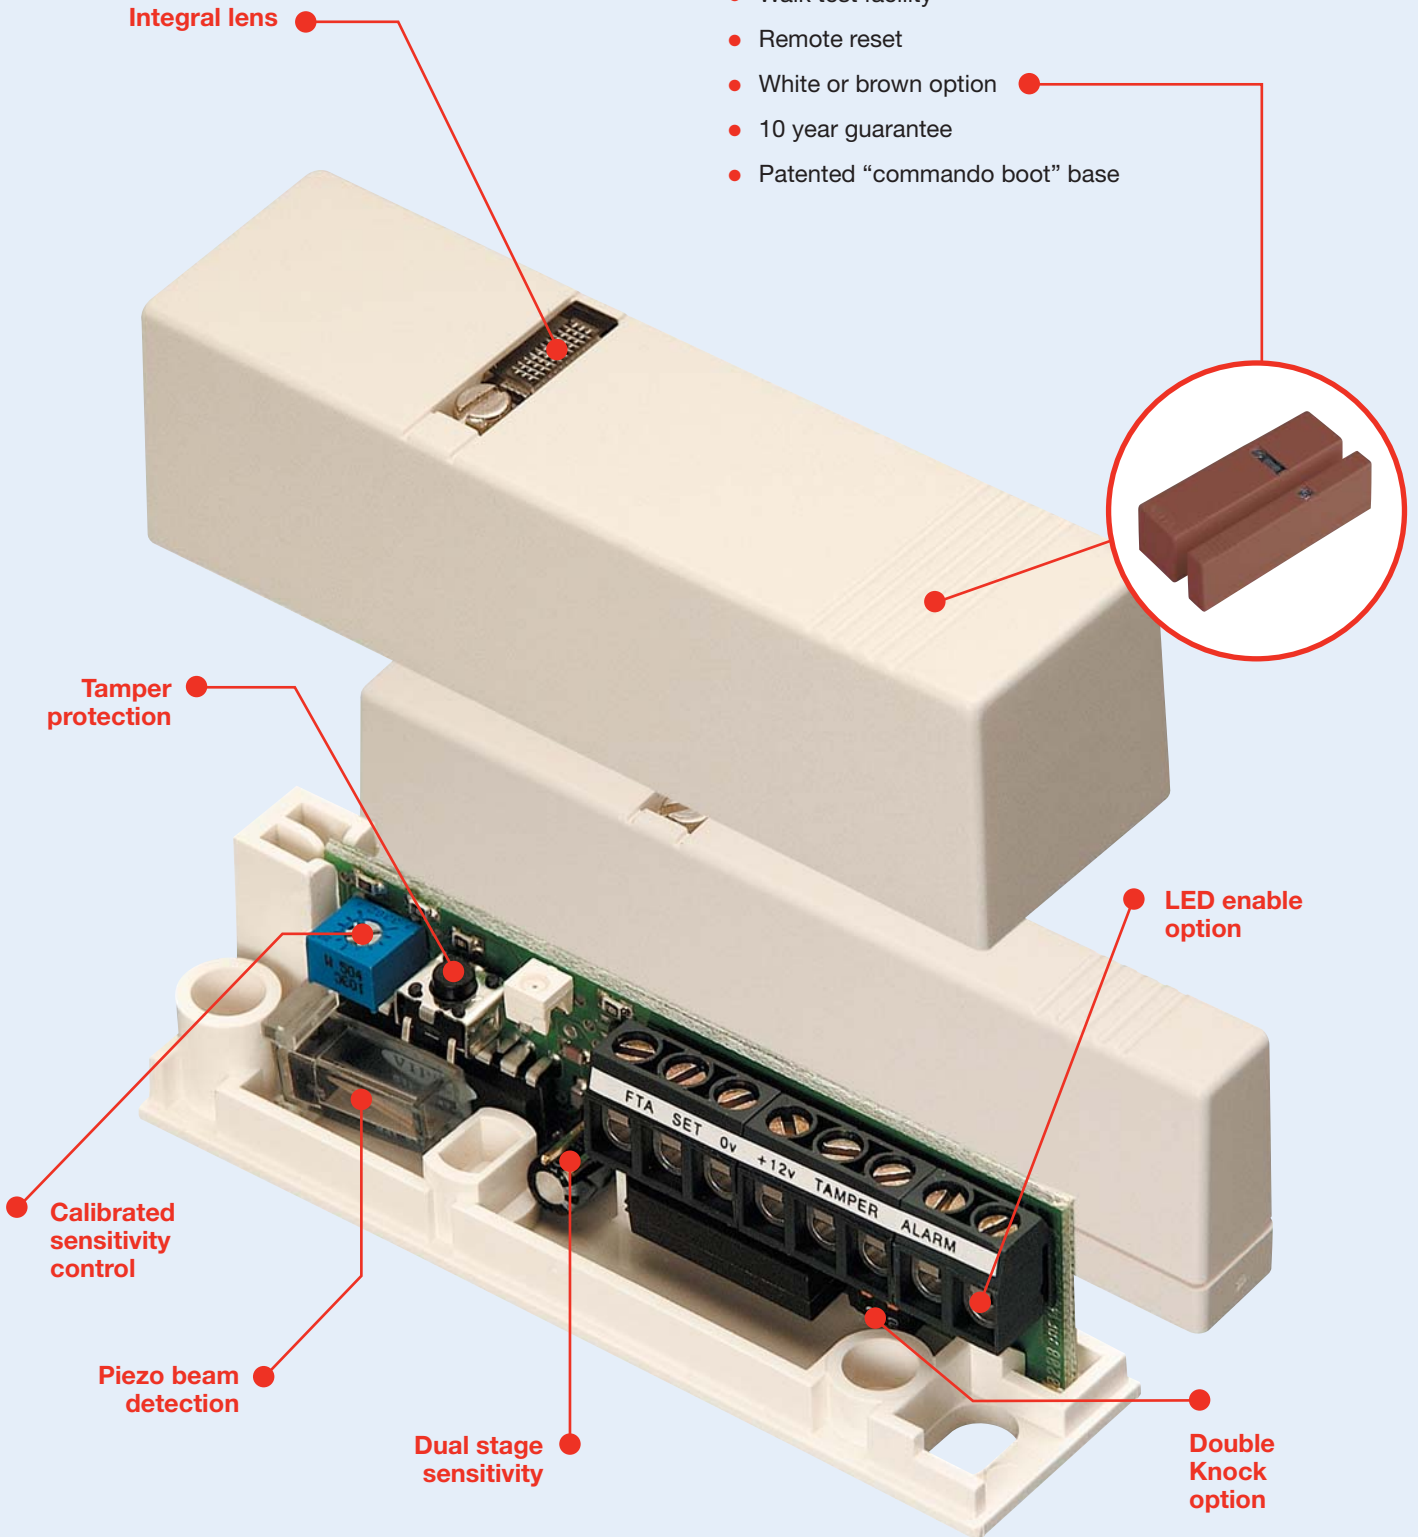



When it comes to Perimeter Protection, Viper is the brand that has become the generic term, accepted by all as the market leader – with over 2,000,000 units having being fitted worldwide. The latest offerings are based on extremely successful predecessors and have a number of user requested upgrade features incorporated. These include removable electronics and dual stage sensitivity settings, enabling a much more accurate set up even in the most testing circumstances.

Immediate indication of attack at point of attempted entry

The intruder will be detected as soon as they attempt entry – you will be able to pinpoint the exact location of attack. This is indicated by a flashing LED on the activated detector.

Detection before entry is gained

The potential intruder can be alerted to their detection prior to gaining entry. This may cause the intruder to flee and so preventing the opportunity for a crime to take place.

Minimal damage

Due to early detection and alert, the damage caused should be limited in scope and cost.




24 hour protection


The alarm system can be left permanently SET, protecting the perimeter at all times.


Occupants and pets

Throughout the night your freedom of movement and that of your animals will not be hampered, as might be the case with purely internal PIR detection.

The Viper range of perimeter products are the most extensive that you will find from any one manufacturer and are tailored to the need of the installer / end user. The range includes a Calibration Tool that allows for regular and repeated accurate sensitivity set up, the V Box, a purpose designed heavy duty enclosure for wall mounted Viper detectors in high security areas and a cleverly designed shock sensor with integral door contact facility.

SPECIFICATION			
	GL	GLX	GLX plus Contacts
Operating Voltage	12v DC nominal (9.5 to 15v)	12v DC nominal (9.5 to 15v)	12v DC nominal (9.5 to 15v)
Current Consumption	9mA @ 12v DC	9mA @ 12v DC	9mA @ 12v DC
Temperature Range	-10°C to +50°C	-10°C to +50°C	-10°C to +50°C
Removable Electronics	Yes	Yes	Yes
Colour	White or Brown	White or Brown	White or Brown
Double Knock Select	By link	By switch	By switch
LED Enable	By link	By switch	By switch
Installation	On any plane via 2 supplied fixing screws		
Dimensions	85mm x 25mm x 23mm		
Door Contact Dimensions	–	–	85 x 25 x 10mm
Coverage	Nominally 2.5metres radius (dependent on location and material) Sensitivity individually adjustable to suit local environmental conditionsw		

SPECIFICATION	CALIBRATION TOOL
	<p>Pre-set at 6kg per cm square constant level of shock to door or window frames</p> <p>Must never be used directly on glass</p> <p>Provides consistent level of shock to test and calibrate the sensitivity levels desired</p>

SPECIFICATION	UNIVERSAL V BOX
	<p>Used for mounting Viper Products, on brickwork and other walling materials</p> <p>Increases vibration path into Unit</p> <p>Increases vibration path into Unit</p> <p>Connected with metal conduit, through which cables may pass.</p> <p>Fixings provided.</p>

LIST NUMBER	DESCRIPTION	LIST NUMBER	DESCRIPTION
PC.09000.20	Viper GLX White	PC.09004.20	Viper GLX + Contacts White
PC.09000.50	Viper GLX Brown	PC.09004.50	Viper GLX + Contacts Brown
PC.09003.20	Viper GL White	PC.06138.00	Viper Calibration Tool
PC.09003.50	Viper GL Brown	PC.07840.00	Universal V Box



Honeywell Security & Custom Electronics

Network 121
 1446 WV Purmerend
 The Netherlands
 Tel +31 (0) 299-410200
 Fax +31 (0) 299-410201
www.honeywell.com/security/nl

Honeywell Security & Custom Electronics

Newhouse Industrial Estate
 Motherwell
 Lanarkshire
 ML1 5SB
 Tel +44 (0)1698 738200
 Fax +44 (0)1698 738300
 Literature +44 (0)870 240 3387
www.honeywell.com/security/uk/intruder

To reorder this literature,
 call +44 (0)870 240 3387 quoting ref:
 HSCE-VIPER-02-EN(0407)SB-C
 April 2007
 © 2007 Honeywell International Inc.

